

Linux Embedded **NVR standalone**

NVRmini



Open Platform – 8 brands / 220 models
Support RAID 0, 1, 10, 5
Stable – Linux embedded



Video Analysis



Web Live View / Remote




Distance Control



PTZ Activate

System Implanted

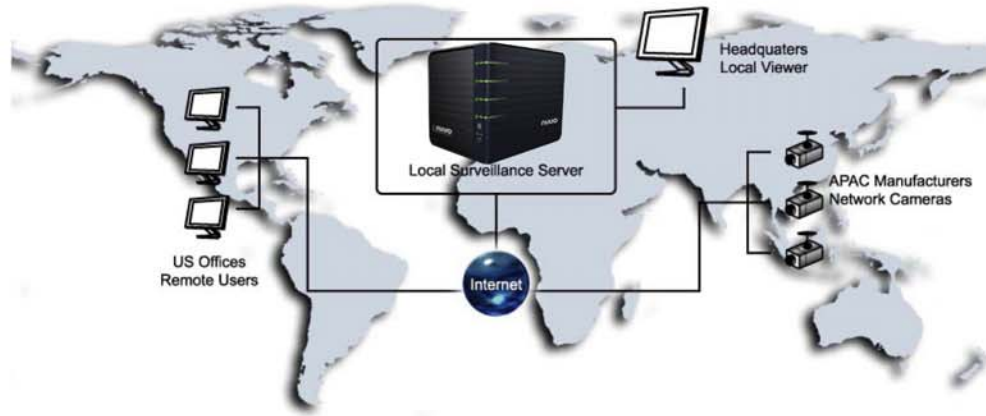

System Specifications

NVR NAS-Based Specifications		
Model	NVS-04	NVS-08
Recording Cameras	4	8
Video		
IP Camera Brand Support	Axis, D-Link, Level One, Panasonic, Sony, Vivotek, Zavio, and more...	
Compression Format	MPEG-4;M-JPEG (depend on IP camera)	
Video Setting	Resolution, quality, frame rate	
Recording		
Recording Performance	Up to 120 fps (NTSC)/100 fps (PAL) at CIF	Up to 240 fps (NTSC)/200 fps (PAL) at CIF
Recording Type	continuous record, record by schedule, manual record, event trigger record, digital input trigger record	
Auto Recycling Recording	Auto recycling when storage disk is full.	
Audio & Video Recording	Audio & video recording in synchronization.	
Playback		
Smart Search	General motion, Missing object, Foreign object, Lose focus, Camera occlusion	
Playback Control	Playback, backward playback, fast forward/backward, ...	
Security		
CMS	Supported by NUUO CMS	
Operation System	Linux embedded, free from PC crash and virus attack	
User Account	Additional accounts can be created to allow user access to the system	
Remote PC Minimum Requirements		
OS Supported	Windows XP / Windows 2003	
CPU	Pentium 4 – 2.4 GHz	Pentium 4 – 2.8 GHz
RAM	512 MB	
User Interface	1. HTTP Web browser - Internet Explorer v6 or later 2. NUUO Client Application Program	
Client Application Program		
Remote Live View Channels	Live View Maximum 16 channels at the same time.	
Remote Live View Control	Live view, preset/go, PTZ functions, remote IO, snapshot	
Remote Playback Control	Playback, backward playback, fast forward/backward, ...	